




Technical information

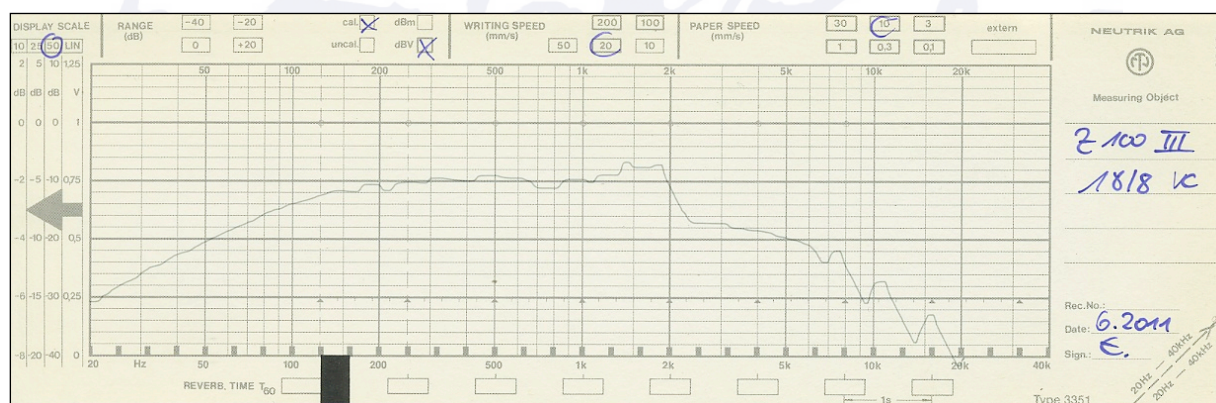

Micro Precision Z 100 MK III 18/8 Midrange


Features :

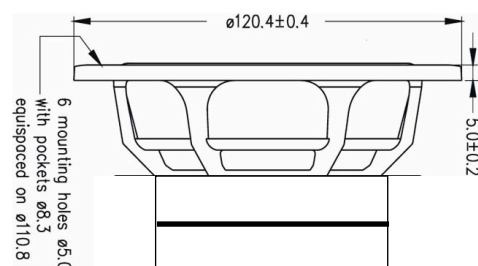

Technical Data

Height total [mm]	64	Membrane	Z
Outer Diameter [mm]	120,5	Voicecoil	Aluminium
Cutout Diameter [mm]	98,2	Housing	1- 5 Liter
Interior Depth [mm]	60	Impedance	4 Ω
Drillcircle [mm]	110,8	Filtering	150 - 2500 Hz.
		Surround	Rubber
		Magnet	Double-Ferrite
		Basket	Die Casting
Weight	1,65 Kg / Pair		

Technical information



Micro Precision Z 100 Mk III 18/8 Midrange

Measure		Unit
Re	4,26	Ω
Fs	72	Hz.
Qes	0,54	-
Qms	3,58	-
Qts	0,47	-
Le	0,37	mH.
VAS	4,15	Liter
Mms	5,89	Gramm
Cms	828	$\mu\text{M}/\text{Newton}$
Eff.	87	1W. / 1M.
Diam	87	mm.
Rms	0,74	R

Liter	Q	f3
1	0,7	120 Hz
2	0,6	100 Hz
5	0,5	87 Hz
10	0,45	82 Hz
20	0,43	80 Hz
100	0,41	78 Hz
200	-	-
Vented	D/L cm	f3
5	3/8	59,2
	5/26	