


F SERIES

W4-1320SD

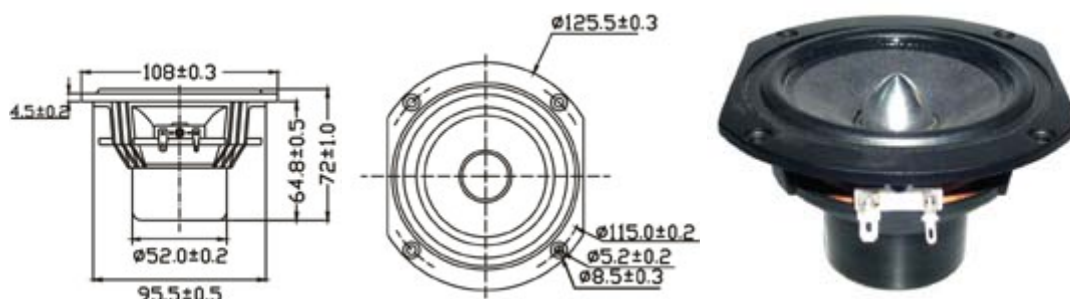

4" PAPER FULL RANGE

- FULL RANGE DESIGN
- BAMBOO FIBER PAPER CONE WITH WIDE RANGE TEMPERATURE RUBBER SURROUND
- DIE CAST BASKET
- VENTED POLE PIECE
- NEODYMIUM DESIGN, MAGNETIC SHIELDED, UNDERHUNG DESIGN
- LOW 2nd, 3rd DISTORTION DESIGN



DIAPHRAGM MTL	Paper
SURROUND MTL	Rubber
NOMINAL IMPEDANCE	8 Ω
DCR IMPEDANCE	6.8 Ω
SENSITIVITY 1W/1m	89 dB
FREQUENCY RESPONSE	75-20K Hz
FREE AIR RESONANCE	75 Hz
VOICE COIL DIAMETER	25.4 mm
AIR GAP HEIGHT	8 mm
RATED POWER INPUT	25 W
MAXIMUM POWER INPUT	50 W
FORCE FACTOR, BL	4.8 TM
MAGNET WEIGHT (oz)	Neodymium
MOVING MASS	3.49 g
FERRO FLUID ENHANCED	No
SUSPENSION COMPL.	1297MN ⁻¹
EFFEC.PISTON AREA	0.0057M ²
Levc	0.01mH
Zo	28ohm
X-max	3 mm
Vas	5.99 Litr.
Qts	0.37
Qms	1.50

TB SPEAKERS
 VOICE:886.2.26570282 FAX:886.2.26580166
 E-MAIL: info@tb-speaker.com

Qes

0.48

CLOSE