
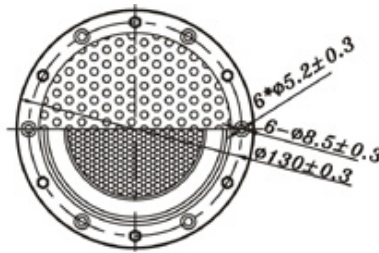


## F SERIES

## W4-1798S

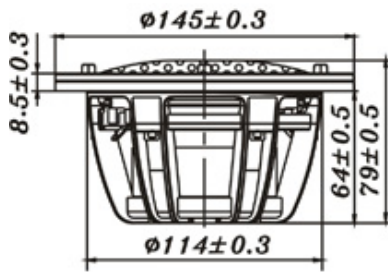

- IT'S THE SIZE OF 4.5"
- FULL RANGE FREQUENCY DESIGN
- WIDE DISPERSION PERFORMANCE
- FLAT ALUMINUM SANDWICH CONE
- NEODYMIUM MAGNET SYSTEM
- LOW 2nd AND 3rd DISTORTION
- IT'S GOOD FOR FULL RANGE OR MID-RANGE APPLICATION

## 4" SANDWICH FULL RANGE / MID RANGE



DIAPHRAGM MTL	Sandwich
SURROUND MTL	Foam Rubber
NOMINAL IMPEDANCE	4 W
DCR IMPEDANCE	3.6 W
SENSITIVITY 1W/1m	87 dB
FREQUENCY RESPONSE	60-20 KHz
FREE AIR RESONANCE	60 Hz
VOICE COIL DIAMETER	49.5 mm
AIR GAP HEIGHT	12 mm
RATED POWER INPUT	40 W
MAXIMUM POWER INPUT	80 W
FORCE FACTOR, BL	5.75 TM
MAGNET WEIGHT ( oz)	Neodymium
MOVING MASS	9.98 g
FERRO FLUID ENHANCED	No
SUSPENSION COMPL.	847.55 uMN <sup>-1</sup>
EFFEC.PISTON AREA	0.0078 M <sup>2</sup>
Levc	0.009 mH
Zo	19 ohm
X-max	3 mm
Vas	7.42 Litr.
Qts	0.30
Qms	1.61
Qes	0.37



VOICE:886.2.26570282 FAX:886.2.26580166  
E-MAIL :info@tb-speaker.com

**CLOSE**