


SU SERIES

W69-1042J

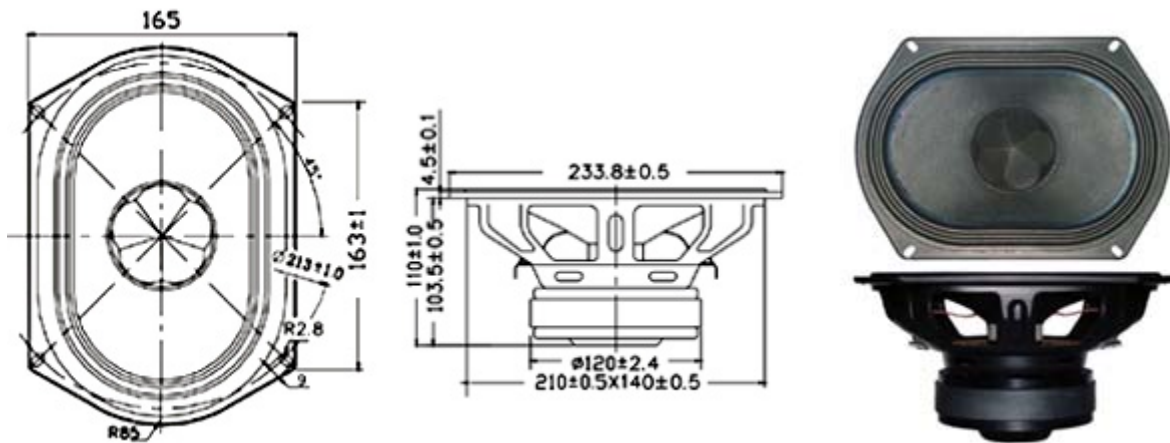

6*9" PAPER SUBWOOFER

- LONG THROW HIGH POWER LOADING DESIGN
- OVAL SHAPE PAPER CONE WITH TWIN ROLL RUBBER SURROUND
- VENTED POLE PIECE
- STAMPED STEEL BASKET
- SUITABLE FOR SUBWOOFER APPLICATION

DIAPHRAGM MTL	Paper
SURROUND MTL	Rubber W Shape
NOMINAL IMPEDANCE	8 Ω
DCR IMPEDANCE	6.5 Ω
SENSITIVITY 1W/1m	87 dB
FREQUENCY RESPONSE	35-350 Hz
FREE AIR RESONANCE	35 Hz
VOICE COIL DIAMETER	38.5 mm
AIR GAP HEIGHT	8 mm
RATED POWER INPUT	90 W
MAXIMUM POWER INPUT	170 W
FORCE FACTOR, BL	12.83 TM
MAGNET WEIGHT (29.2oz)	826 g
MOVING MASS	46 g
FERROFLUID ENHANCED	No
SUSPENSION COMPLIANCE	523.7693MN ⁻¹
EFFECTIVE PISTON AREA	0.0226m ²
Levc	3.2739mH
Zo	112.823ohm
X-max	7 mm
Vas	37.99 Litr.





VOICE:886.2.26570282 FAX:886.2.26580166
E-MAIL :info@tb-speaker.com

Qts	0.35
Qms	6.05
Qes	0.37

CLOSE