


SU SERIES

WQ-1814S

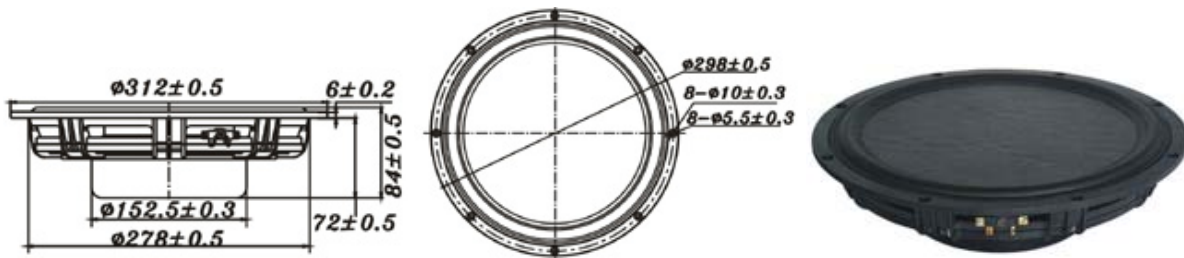

- 12" SHALLOW STRUCTURE OF SUBWOOFER DRIVER
- FLAT SANDWICH CONE WITH RUBBER SURROUND
- NEODYMIUM MAGNET SYSTEM
- 72mm OF EFFECTIVE HEIGHT
- DIAMETER OF VC=5INCH
- PATENTED ENGINEERING PLASTIC BASKET DESIGN
- QTS:0.43

12" SANDWICH SUBWOOFER



DIAPHRAGM MTL	Sandwich
SURROUND MTL	Rubber
NOMINAL IMPEDANCE	4 W
DCR IMPEDANCE	3.4 W
SENSITIVITY 1W/1m	88 dB
FREQUENCY RESPONSE	35-500K Hz
FREE AIR RESONANCE	35 Hz
VOICE COIL DIAMETER	127.5 mm
AIR GAP HEIGHT	8 mm
RATED POWER INPUT	300 W
MAXIMUM POWER INPUT	600 W
FORCE FACTOR, BL	13.23 TM
MAGNET WEIGHT (oz)	Neodymium
MOVING MASS	129.72 g
FERRO FLUID ENHANCED	No
SUSPENSION COMPL.	171.938 μMN^{-1}
EFFEC.PISTON AREA	0.05 M^2
Levc	0.181 mH
Zo	18 ohm
X-max	4 mm
Vas	61.04 Litr.
Qts	0.43
Qms	2.19
Qes	0.53



VOICE:886.2.26570282 FAX:886.2.26580166
E-MAIL :info@tb-speaker.com

CLOSE