


SU_{SERIES}

WT-1427G

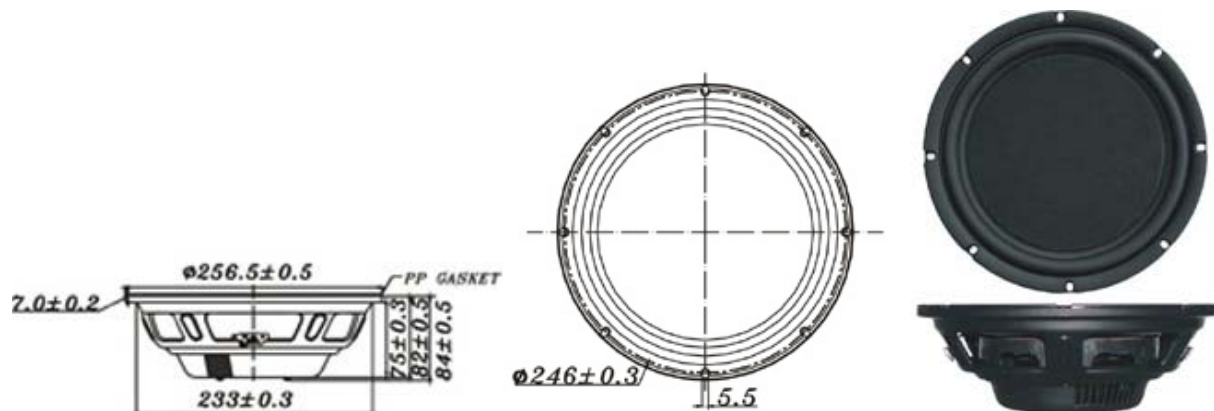

10" SUBWOOFER

- LONG THROW,SHALLOW,HIGH POWER LOADING DESIGN
- NEODYMIUM MOTOR STRUCTURE, VENTED POLE PIECE
- STAMPED STEEL BASKET, MAGNETIC ALLY SHIELDED
- SUITABLE FOR SUBWOOFER APPLICATION
- PP INJECTION CONE WITH WIDE RANGE



TB SPEAKERS
 VOICE:886.2.26570282 FAX:886.2.26580166
 E-MAIL :info@tb-speaker.com

DIAPHRAGM MTL	PP INJECTION
SURROUND MTL	Rubber
NOMINAL IMPEDANCE	4 W
DCR IMPEDANCE	3.2 W
SENSITIVITY 1W/1m	85 dB
FREQUENCY RESPONSE	25-400 Hz
FREE AIR RESONANCE	25 Hz
VOICE COIL DIAMETER	65.5 mm
AIR GAP HEIGHT	6 mm
RATED POWER INPUT	120 W
MAXIMUM POWER INPUT	240 W
FORCE FACTOR, BL	17.35 TM
MAGNET WEIGHT (oz)	Neodymium
MOVING MASS	189.58 g
FERRO FLUID ENHANCED	No
SUSPENSION COMPL.	219.748 uMN ⁻¹
EFFEC.PISTON AREA	0.035 M ²
Levc	0.69 mH
Zo	40 ohm
X-max	9.5 mm
Vas	38.23 Litr.
Qts	0.29
Qms	3.42
Qes	0.31

CLOSE